



川磊电子科技  
ThreeLayer Technologies, Inc.  
專業電感製造商

# 南充新川电子科技有限公司

ThreeLayer Scientific-Technics Co.,Ltd



## 产品承认书

SPECIFICATION FOR APPROVAL

客户名称 -----  
*CUSTOMER NAME.*

产品类型 Shielded Power Inductors  
*PRODUCT TYPE*

客户料号 -----  
*CUSTOMER P/N*

川磊料号 CLPS-6015 SERIES  
*OURS P/N*

文件编号 SP-21070606  
*FILE NO.*

客户承认/CUSTOMER ACCEPTED		
承认 <i>APPROVED</i>	确认 <i>CHECKED</i>	承办 <i>DESIGN</i>
批注/REMARK		

批准 <i>APPROVED</i>	确认 <i>CHECKED</i>	作成 <i>DESIGN</i>
程志华	陈尧	潘立


生产工厂：南充川磊电子科技有限公司  
销售公司：南充新川电子科技有限公司  
业务专线：0817-2111163/18681773184  
邮 件：threeayer\_sales@163.com  
地 址：四川省南充市顺庆区潞华工业园区华生东路






客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6015 SERIES	文件编号 FILE NO.	SP-21070606

一.尺寸图/DIMENSION (单位/UNIT : mm)

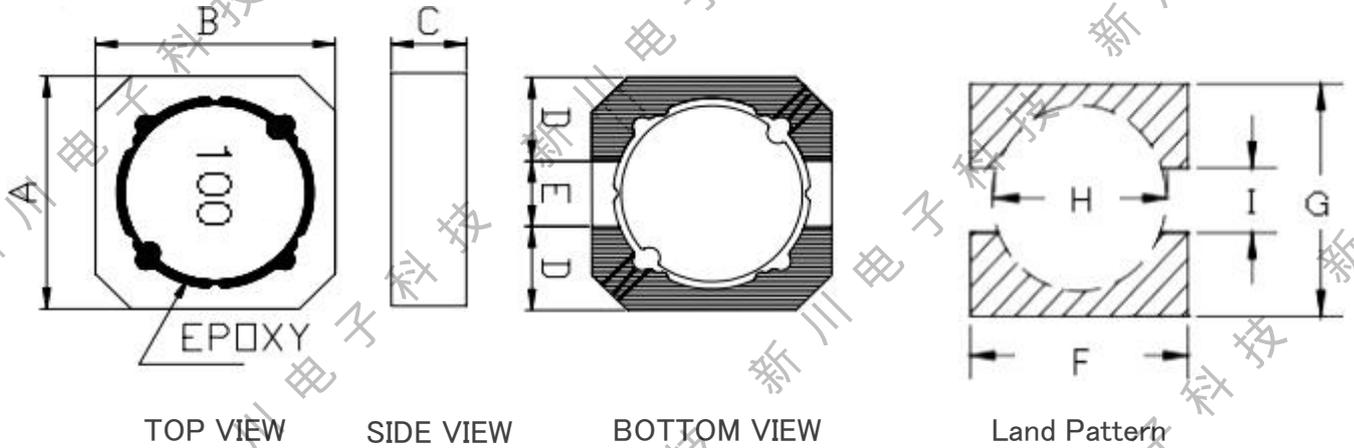

ITEM	A	B	C	D	E	F	G	H	I
DIM	6.0	6.0	1.5	2.0	2.0	6.6	6.6	4.6	2.0
TOLE	±0.2	±0.2	Max	Typ	Typ	Typ	Typ	Typ	Typ

二.电路图/CIRCUIT DIAGRAM



三.注意事项/NOTE :

1.印字：白色Gulim字体

四.电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Inductance (uH)	Tolerance	Test Frequency (Hz)	DCR (mΩ) Max	IDC1 (A) Max.	IDC2 (A) Max.	MARK
CLPS-6015-3R0□	3.0	N	100K/0.1V	65	2.2	2.1	3R0
CLPS-6015-3R3□	3.3	N	100K/0.1V	75	2.1	2	3R3
CLPS-6015-3R6□	3.6	N	100K/0.1V	80	2.0	1.9	3R6
CLPS-6015-6R8□	6.8	N	100K/0.1V	130	1.6	1.4	6R8

- (1).Specify the inductance tolerance, K(±10%), L(±15%), M(±20%),N(±30%)
- (2).IDC1:Base on temp.rise &  $\Delta L/L0A \leq 30\%$  MAX
- (3).IDC2:Temp.rise 40°C Typ
- (4).Operating temp.: -40°C to +125°C
- (5).Storage temp.: -20°C up to +40°C, 75% RH max.

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6015 SERIES	文件编号 FILE NO.	SP-21070606


五.材料清单/MATERIAL LIST

NO.	ITEM	DESCRIPTION
1	CORE	FERRITE
2	WIRE	P180 Grd1
3	ADHESIVE	XNR3614
4	INK	WHITE

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6015 SERIES	文件编号 FILE NO.	SP-21070606


六.可靠性测试/RELIABILITY TESTING

Operating Temperature	- 40 to +125 °C ( Contain Heating coil )
Appearance Inspection	No external defects by visual inspection
Terminal Strength	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. ( Refer to figure at right )
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core
Temperature characteristics	Inductance coefficient ( 0~2,000 ) × 10 / °C ( - 40~ + 125 °C )
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition

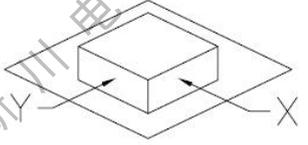

A test is made under the above mentioned condition , and it is kept for 2 hours in the normal


IR Reflow profile

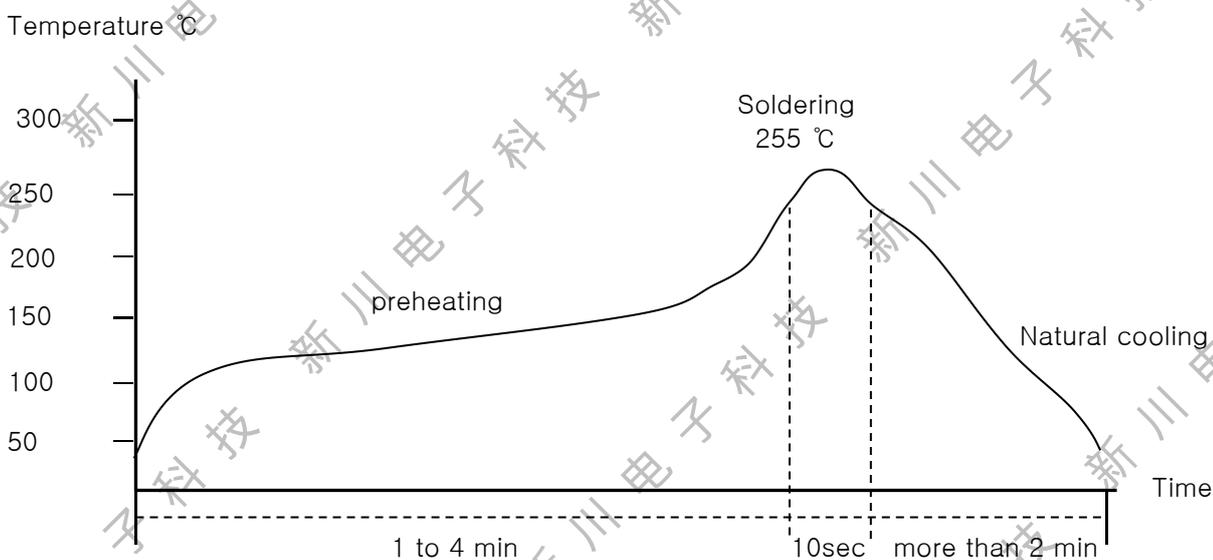

Temperature and humidity . After that , no mechanical and electrical defect should be found .


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6015 SERIES	文件编号 FILE NO.	SP-21070606

七.编带规格/TAPING SPECIFICATIONS

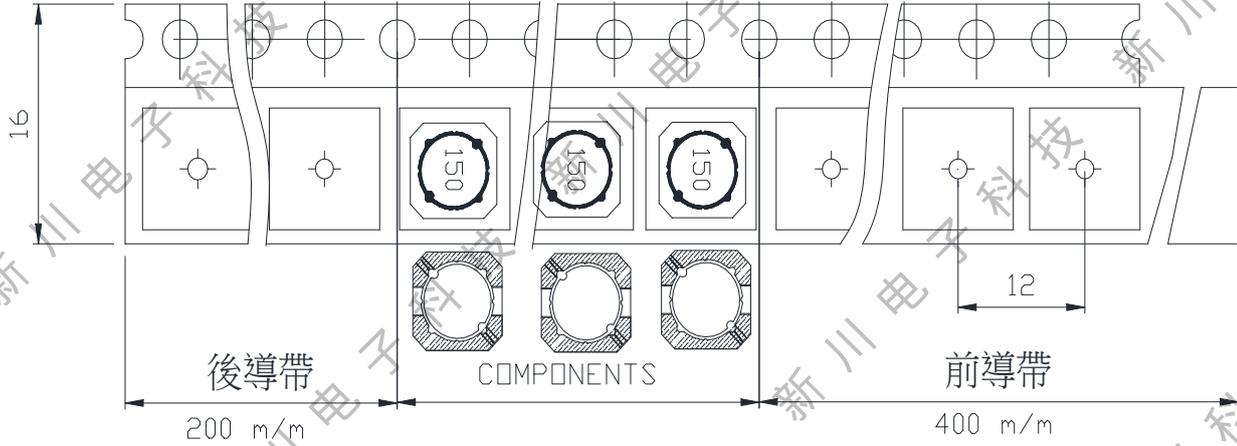


Transparent carrier and cover tape/透明载带和自粘上带


Adhesive strength of cover tape is 20 to 120 gf  
The conduction band direction

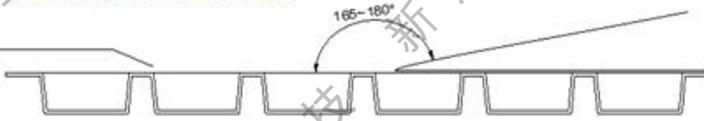

Reel Dimensions (Unit: mm)				Quantity
A	B	C	D	Pcs/Reel
330	100	13	16.5	2000

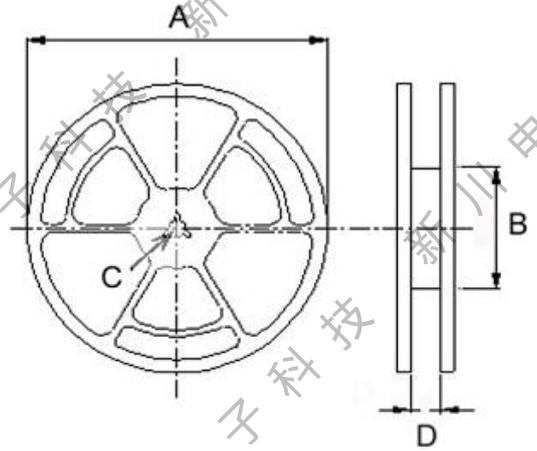

八.包装方式/PACKING LIST

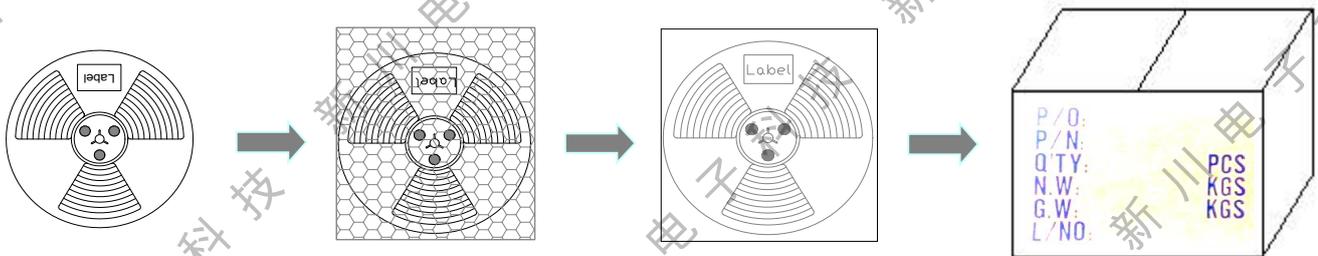

轮盘：13'(直径330mm)  
数量：2000PCS/盘

PE袋  
数量：2000PCS/袋

内盒  
数量：6000PCS/盒

外箱，数量：30000PCS/箱  
不足整箱用内盒或填充物  
装满