



川磊电子科技  
ThreeLayer Technologies, Inc.  
專業電感製造商

南充新川电子科技有限公司

ThreeLayer Scientific-Technics Co.,Ltd



产品承认书

SPECIFICATION FOR APPROVAL

客户名称 -----  
CUSTOMER NAME.

产品类型 Shielded Power Inductors  
PRODUCT TYPE

客户料号 -----  
CUSTOMER P/N

川磊料号 CLPS-6025 SERIES  
OURS P/N

文件编号 SP-18112101  
FILE NO.

客户承认/CUSTOMER ACCEPTED		
承认 APPROVED	确认 CHECKED	承办 DESIGN
批注/REMARK		

批准 APPROVED	确认 CHECKED	作成 DESIGN
程志华	陈尧	潘立


生产工厂：南充川磊电子科技有限公司  
销售公司：南充新川电子科技有限公司  
业务专线：0817-2111163/18681773184  
邮 件：threeayer\_sales@163.com  
地 址：四川省南充市顺庆区潞华工业园区华生东路






客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6025 SERIES	文件编号 FILE NO.	SP-18112101

一.尺寸图/DIMENSION (单位/UNIT : mm)

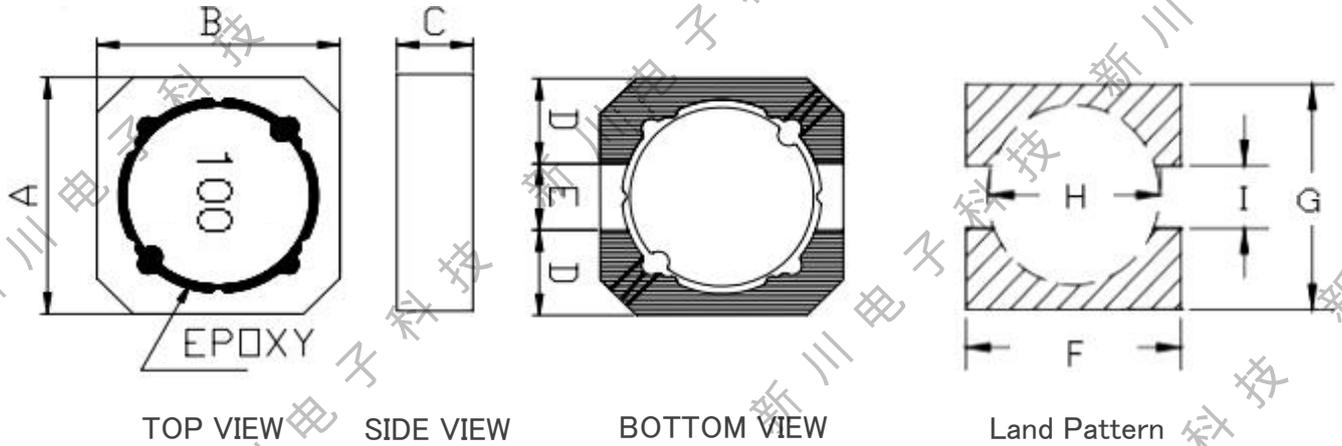

ITEM	A	B	C	D	E	F	G	H	I
DIM	6.0	6.0	2.5	2.0	2.0	6.6	6.6	4.6	2.0
TOLE	±0.2	±0.2	Max	Typ	Typ	Typ	Typ	Typ	Typ

二.电路图/CIRCUIT DIAGRAM



三.注意事项/NOTE :

1.印字：白色Gulim字体

四.电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Inductance (uH)	Tolerance	Test Frequency (Hz)	DCR (mΩ) Max	IDC1 (A) Max.	IDC2 (A) Max.	MARK
CLPS-6025-1R0□	1.0	N	100K/0.1V	35	5.5	1.80	1R0
CLPS-6025-1R2□	1.2	N	100K/0.1V	40	5.3	1.65	1R2
CLPS-6025-1R5□	1.5	N	100K/0.1V	40	5.3	1.65	1R5
CLPS-6025-2R2□	2.2	N	100K/0.1V	45	3.9	1.40	2R2
CLPS-6025-3R3□	3.3	N	100K/0.1V	55	3.5	1.35	3R3
CLPS-6025-4R7□	4.7	N	100K/0.1V	65	3.1	1.30	4R7
CLPS-6025-5R0□	5.0	N	100K/0.1V	65	3.1	1.30	5R0
CLPS-6025-6R8□	6.8	M N	100K/0.1V	95	2.7	1.30	6R8
CLPS-6025-8R2□	8.2	M N	100K/0.1V	100	2.2	1.30	8R2
CLPS-6025-100□	10	M N	100K/0.1V	105	2	1.30	100
CLPS-6025-150□	15	M N	100K/0.1V	135	2	1.20	150

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6025 SERIES	文件编号 FILE NO.	SP-18112101

四.电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Inductance (uH)	Tolerance	Test Frequency (Hz)	DCR (mΩ) Max	IDC1 (A) Max.	IDC2 (A) Max.	MARK
CLPS-6025-220□	22	M N	100K/0.1V	175	1.4	1.10	220
CLPS-6025-330□	33	M N	100K/0.1V	260	1.1	0.90	330
CLPS-6025-470□	47	M N	100K/0.1V	420	0.98	0.80	470
CLPS-6025-680□	68	M N	100K/0.1V	500	0.58	0.70	680
CLPS-6025-101□	100	M	100K/0.1V	700	0.46	0.60	101
CLPS-6025-151□	150	M	100K/0.1V	920	0.4	0.54	151
CLPS-6025-471□	470	M	100K/0.1V	2600	0.22	0.37	471

(1).Specify the inductance tolerance, K(±10%), L(±15%), M(±20%),N(±30%)

(2).IDC1:Base on temp.rise &  $\Delta L/L0A \leq 30\%$  MAX

(3).IDC2:Temp.rise 40°C Typ

(4).Operating temp.: -40°C to +125°C

(5).Storage temp.: -20°C up to +40°C, 75% RH max.


五.材料清单/MATERIAL LIST

NO.	ITEM	DESCRIPTION
1	CORE	FERRITE
2	WIRE	P180 Grd1
3	ADHESIVE	XNR3614
4	INK	WHITE

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6025 SERIES	文件编号 FILE NO.	SP-18112101


六.可靠性测试/RELIABILITY TESTING

Operating Temperature	- 40 to +125 °C ( Contain Heating coil )
Appearance Inspection	No external defects by visual inspection
Terminal Strength	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. (Refer to figure at right )
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core
Temperature characteristics	Inductance coefficient ( 0~2,000 ) × 10 / °C ( - 40~ + 125 °C )
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition

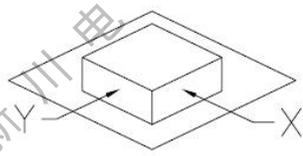

A test is made under the above mentioned condition , and it is kept for 2 hours in the normal


IR Reflow profile

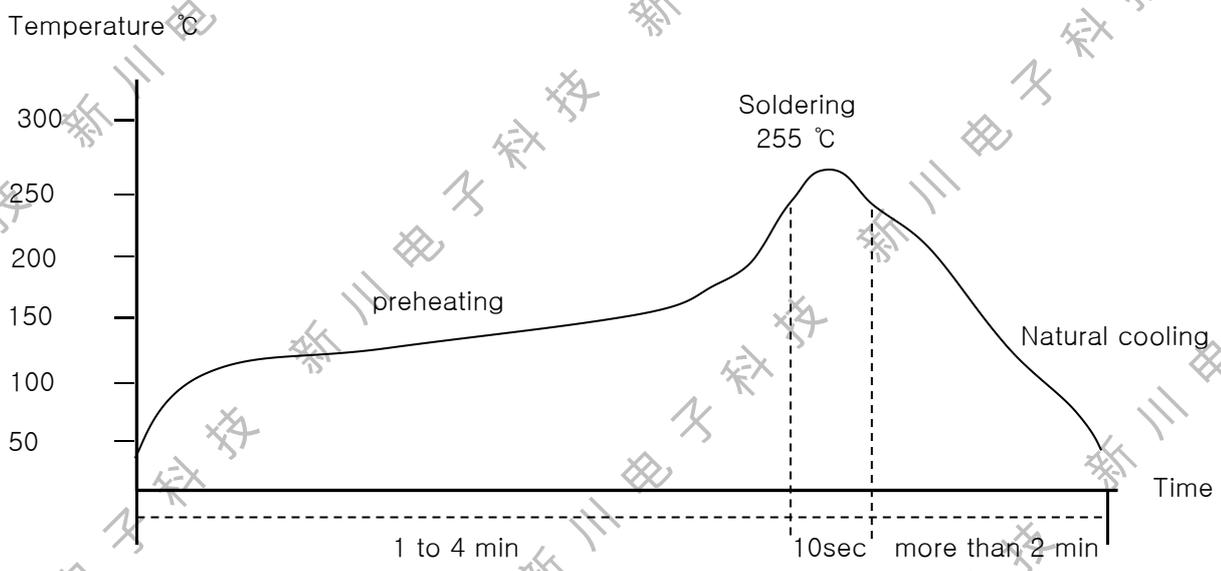

Temperature and humidity . After that , no mechanical and electrical defect should be found .


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	A
产品类型 PRODUCT TYPE	Shielded Power Inductors	新川品名 OURS P/N	CLPS-6025 SERIES	文件编号 FILE NO.	SP-18112101

七.编带规格/TAPING SPECIFICATIONS

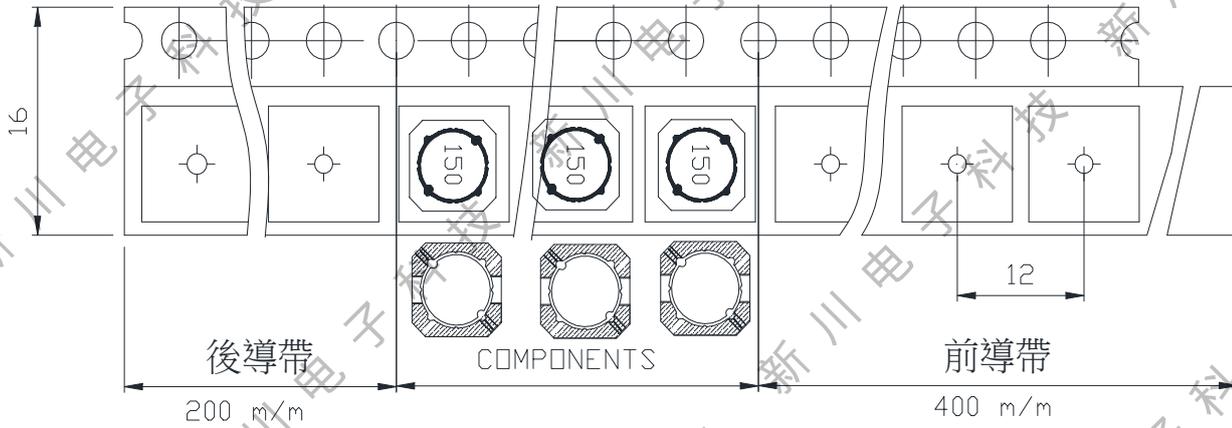


Transparent carrier and cover tape/透明载带和自粘上带


Adhesive strength of cover tape is 20 to 120 gf  
The conduction band direction

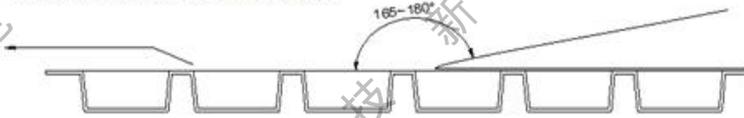

Reel Dimensions (Unit: mm)				Quantity
A	B	C	D	Pcs/Reel
330	100	13	16.5	1500

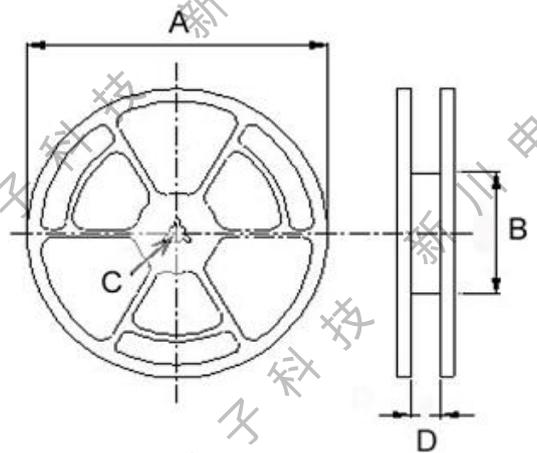

八.包装方式/PACKING LIST

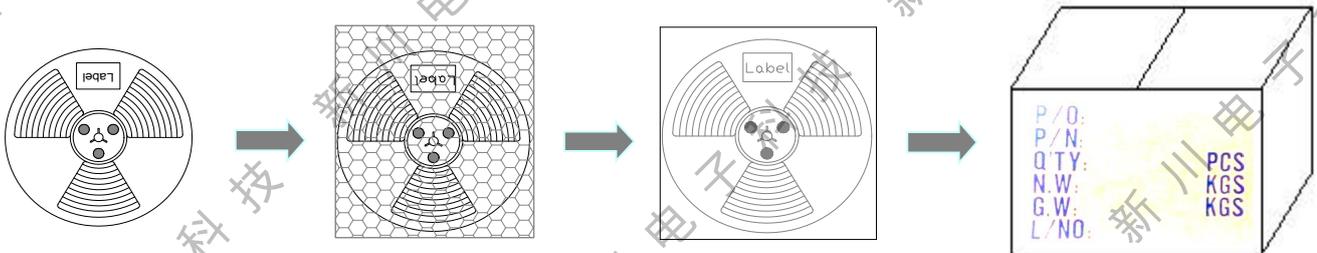

轮盘：13'(直径330mm)  
数量：1500PCS/盘

PE袋  
数量：1500PCS/袋

内盒  
数量：4500PCS/盒

外箱，数量：22500PCS/箱  
不足整箱用内盒或填充物  
装满